REV.	DESCRIPTION	CHANGED	ECN/NO.	DATE
A0	NEW ISSUE			2012/6/17



NOTE:
MATERIAL:
HOUSING:PBT+30% UL 94V-0
COVER:LCP+30% UL 94V-0
CONTACT:PHOSPHOR BRONZE
SHELL:SUS301
PLATING:
CONTACT: GOLD FLASH AND TIN OVER NICKEL PLATED
SHELL: NICKEL PLATED OVER ALL
SPECIFICATION:
CONTACTRESISTANCE:30mΩ MAXIMUM
CONTACT CURRENT RATING:1.5A
DIELECTRIC WITHSTANDING VOLTAGE:500 V R.M.S.
INSULATION RESISTANCE 1000 MEGOHMS MIN
MATING FORCE:3.57Kg MAX
UNMATING FORCE:1.02Kg MIN

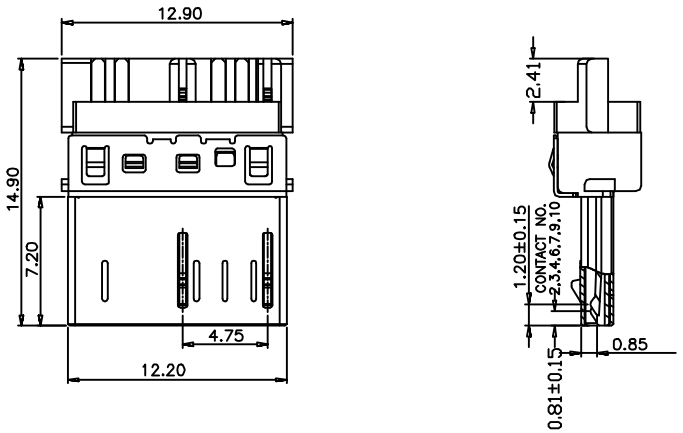

Part Number:

U3M -- 10 H X X XX 02

- U3M: MICRO USB3.0
- --: MALE
- 10: PIN NUMBER:
- H: PROCESSING MODE: H:SOLDER S:SMT
- X: PLATING CODE: A=1u" C=5u" E:15u"
- X: SHELL PLATING: G:FRONT SHELL GOLD PLATING N:FRONT SHELL NICKEL PLATING
- XX: COLOR CODE: 01=WHITE 02=BLACK 05=BULE
- 02: SERIAL NUMBER

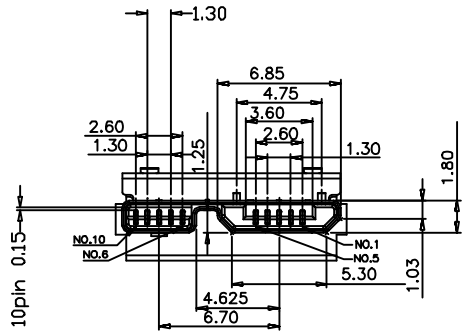

东莞昂瑞电子有限公司 DongGuan Dory Electronic CO., LTD.									
公差参考表				产品名称	MICRO USB 3.0 B/M焊线式主体				
X	±0.35	ANGLE		产品编号	U3M-10HXXXX02-1				
X.X	±0.25	X°	±2°	核准		版本	A0	单位	MM
X.XX	±0.15	X.X°	±1.0°	审核		单重		比例	
X.XXX	±0.050	X.XX°	±0.50°	制图		类型		页数	1/1

[redacted]

公差[illegible]表				产品名称					
X	±0.35	ANGLE		产品编号	U3M-10EXXXX02-3				
X.X	±0.25	X°	±2°	核准		版本	A0	单位	MM
X.XX	±0.15	X.X°	±1.0°	审核		单重		比例	
X.XXX	±0.050	X.XX°	±0.50°	制图		类型		页数	1/1

1 2 3 4 5 6 7 8 9 10