

REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A			INITIAL RELEASE	2012.11.01	Dongmaojie

- NOTE:
- 1.MATERIAL:
 - 1.1.HOUSING: LCP UL94V-0,COLOR:BLACK
 - 1.2.CONTACTS: COPPER ALLOY.
 - 1.3.PEG: COPPER ALLOY.
 - 2.REFLOW SOLDER CAPABLE TO 260°C
 - 3.FINISH:

CONTACT: GOLD PLATING ON CONTACT AREA



1.27um(50u")MIN NICKEL UNDERPLATE OVERALL

PEG: 2.54um[100u"] MIN.MATE-TIN.

1.27um[50u"] MIN.NICKEL PLATED

4.PART NO:43-42 1 0 9-0 5 2 0 1 R HF

HALONGEN FREE
PACKING OPTION
R:TAPE&REEL
T:TRAY
PLATING
1:G/F
2:10u"
LOGO
0:NO LOGO
1:DEREN LOGO
PIN NUMBER
052:52PIN

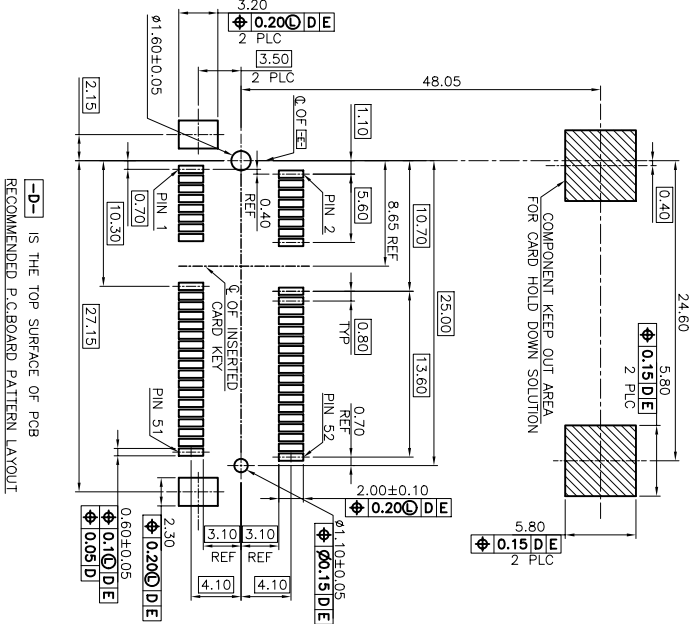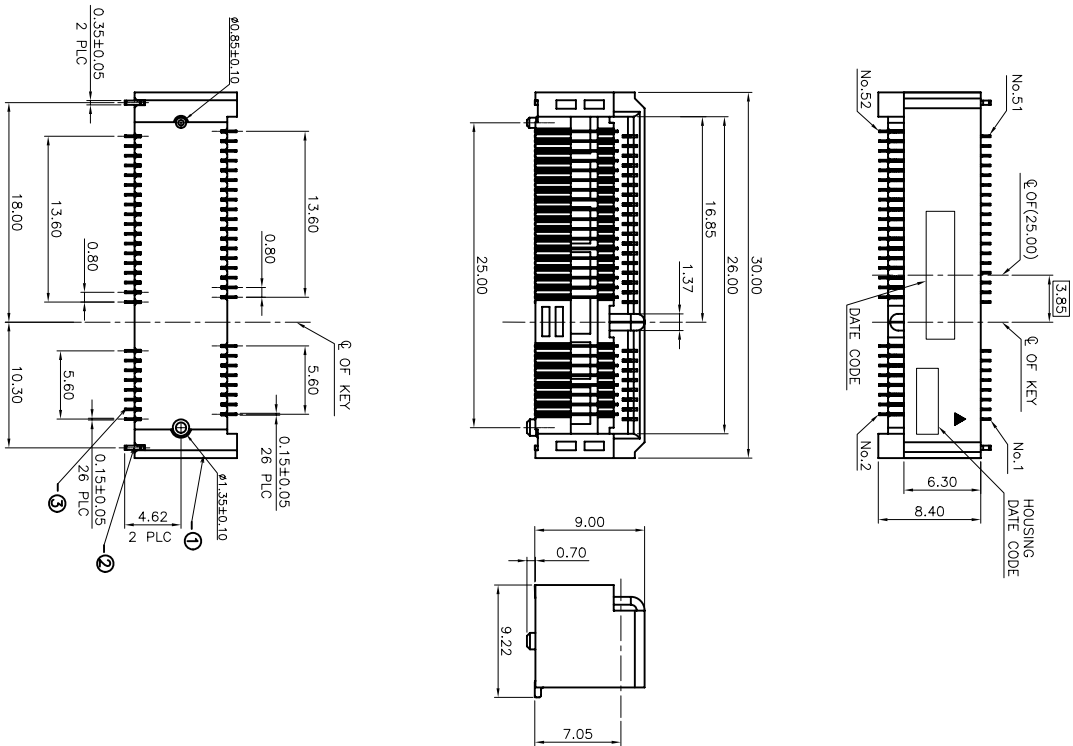



—D— IS THE TOP SURFACE OF PCB
RECOMMENDED P.C.B. BOARD PATTERN LAYOUT

ITEM	NAME	QUANTITY
1	HOUSING	1 PCS
2	PEG	2 PCS
3	CONTACT	52 PCS

东莞昂瑞电子有限公司		DRAW NO.		DESIGN:		CHECK:		APPROVAL:		DATE	
Dongguan Dory Electronic CO., LTD.		T-12-0367		Dongmaojie		Linzhongjie		Linzhongjie		2012.11.01	
CUSTOMER DRAWING		DATE		P/N: 43-42109-05201RHF		SHEET: 1/3		SCALE: 1:1		UNIT: mm	
TITLE: MINI PCI EXPRESS 52PIN 9.0H CONNECTOR		DATE		P/N: 43-42109-05201RHF		SHEET: 1/3		SCALE: 1:1		UNIT: mm	
DIM		TOL		DIM		TOL		REV.		A	
X		±0.30		X		±2°		X		±0.25	
X		±0.25		X		±1°		X		±0.20	
XXX		±0.15									

REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A			INITIAL RELEASE	2012.11.01	Dongguan Jie

- NOTES :
1. MATERIAL :
COVER TAPE : ANTISTATIC P.S T=0.05
CARRIER TAPE : ANTISTATIC P.S T=0.50
REEL : PS UL94V-0
CARTON: CORRUGATED FIBER
 2. DIMENSION :
REEL : SEE DRAWING
SHIPPING BOX: 365X365X250mm
 3. QUANTITY : SEE TABLE
 4. PEELING RESISTANCE : 10gf~130gf (for 12~56mm)
 5. PEELING SPEED : 300mm/MINUTES

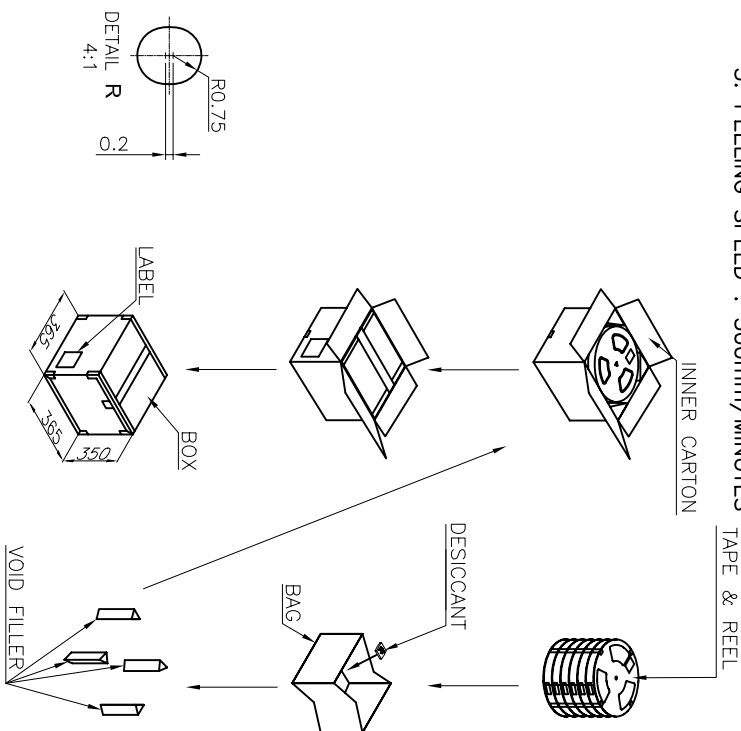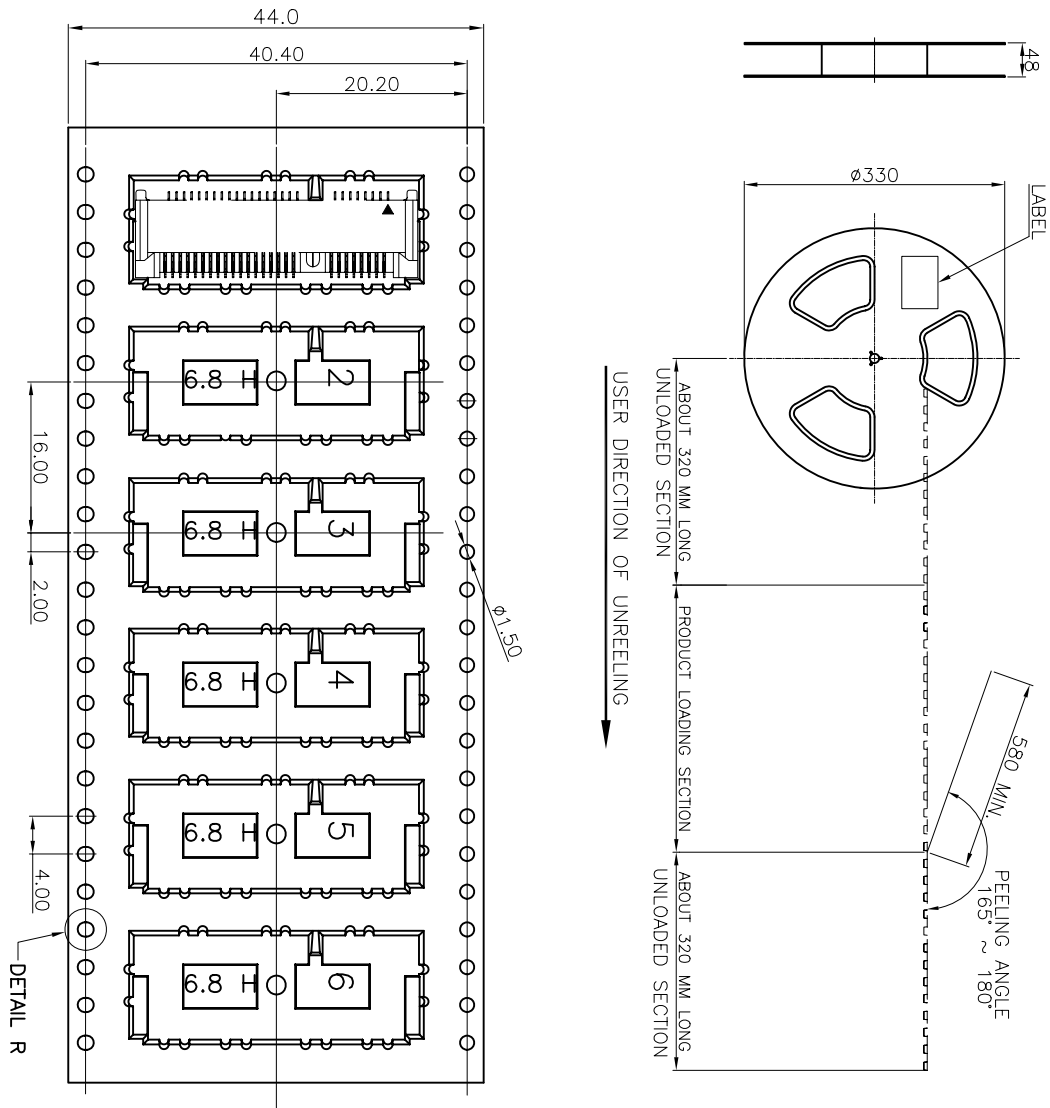

GROSS WEIGHT	NET WEIGHT	PCS/ REEL	REEL/ BOX	PCS/ BOX
11.1KG	6.1KG	350	6	2100

东莞昂瑞电子有限公司
Dongguan Dory Electronic CO., LTD.

DRAW NO.	CUSTOMER DRAWING	DATE	TITLE: MINI PCI EXPRESS 52PIN
T-12-0367	DESIGN: Dongguan Jie	2012.11.01	
REV. A	CHECK: Linzongbiao	2012.11.01	
APPROVAL: Linzongbiao			

DIM.	TOL.	DIM.	DES.
K	K	K	K
K	K	K	K
K	K	K	K